


8GB Computer memory DDR3 for Supermicro SuperServer 6027AX-TRF-HFT2 RDIMM

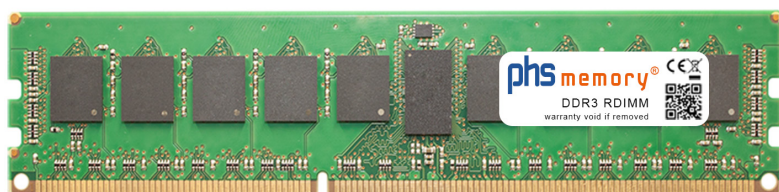

phs memory®

21,68 EUR

plus VAT

25,80 EUR

incl. VAT

in magazzino

<https://www.phs-memory.it>

Version: 24.05.2025 21:29


Your benefits

- ✓ verified quality memory
- ✓ 5 years warranty
Warranty details see last page
- ✓ 100% compatible
- ✓ free support on our hotline
- ✓ fast delivery

PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device - depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

Memory Specification

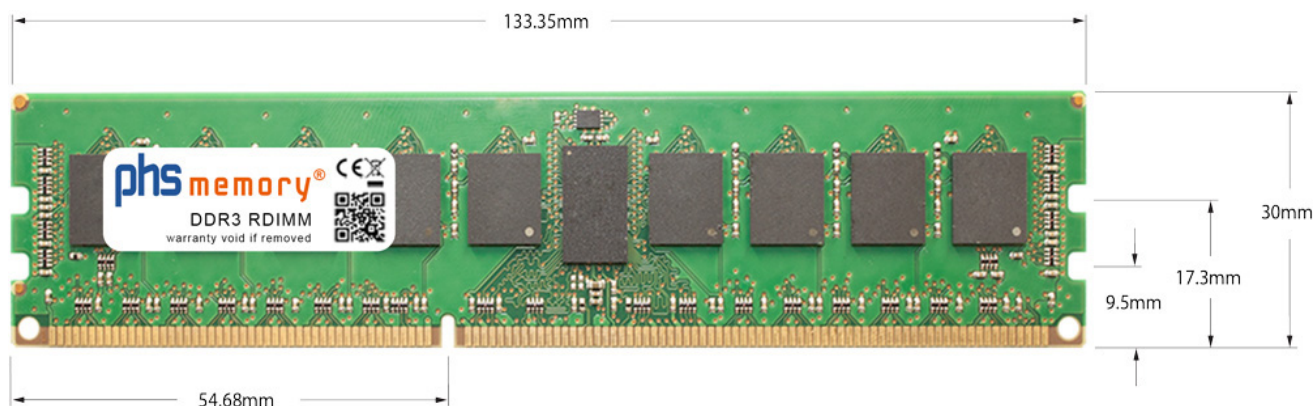

Memory size	8GB
Memory technology	DDR3
ECC support	yes
JEDEC Norm	PC3-12800R
DRAM Organization	1Gx4
Rank	1Rx4
Type	RDIMM (ECC Registered)
Number of pins	240 Pin DIMM
Memory data transfer rate	1600MHz @ CL11
Voltage	1,5 Volt
Speciality	-
Board dimensions	133,35 x 30 (LxB mm)
Operating temperature	0° C - 85° C
Storage temperature	-40° C - +95° C
RoHS compliant	yes
SKU	SP261307
EAN	4063369297579

Note: The module specified in this datasheet is one of several possible configurations available under this part number.
Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.

System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	Supermicro
Device type	Server
Device family	SuperServer
Device series	6027 Serie
Device name	SuperServer 6027AX-TRF-HFT2
Maximum memory*	512GB ECC / 128GB according to manufacturer
Number of memory sockets	16
Annotation	ECC DIMM, Registered DIMM and Load Reduced LRDIMM memory modules must not be mixed. Je Prozessor können 8 Computer memory installiert werden.

* The specifications for the maximum memory upgrade may differ from those of the manufacturer Supermicro. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Information on memory allocation

Which memory configuration is possible?

Our memory team will be happy to help you choose the right memory and configure your server.

Technologie	RAM in maximaler capacity
UDIMM ECC	128GB RAM 2 x (8 x 8GB ECC UDIMM)
RDIMM 2Rank	256GB RAM 2 x (8 x 16GB RDIMM)
RDIMM 4Rank	512GB RAM 2 x (8 x 32GB RDIMM)
LRDIMM	1TB RAM 2 x (8 x 64GB LRDIMM)

ECC DIMM, Registered DIMM and Load Reduced LRDIMM memory modules must not be mixed. Bei einer Aufrüstung sollten Sie deshalb wissen, welche memory bereits vorhanden sind, or komplett auf RDIMMcomputer memory upgrade.

Principles of memory assembly

- Pro CPU sind 4 memorykanäle vorhanden with jeweils 2 memoryslots
- ECC DIMM, Registered DIMM and Load Reduced LRDIMM memory modules must not be mixed
- memorysteckplätze for die kein Prozessor vorhanden ist dürfen nicht bestückt werden

Memory configuration for good system performance

- Verteilen Sie die memory gleichmäßig auf die memorysteckplätze and gleichmäßig auf die CPUs
- Wenn mehr als eine CPU vorhanden sind, sollten die memory pro CPU identisch (gespiegelt zur anderen CPU) bestückt

werden.

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
 - Do not touch the gold pins of the memory module
 - Only touch the sides of the memory module
 - Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.

Further memory options for Supermicro SuperServer 6027AX-TRF-HFT2

Size	SKU	Technology	Type	Number of pins	Brand	Reference no.
4GB	SP261301	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
8GB	SP261307	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
8GB	SP261302	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
16GB	SP261304	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
32GB	SP261305	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
32GB	SP261303	DDR3	LRDIMM (ECC LR DIMM)	240 Pin DIMM	PHS-memory®	

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit <https://www.phs-memory.it/-W5Y>



Contact Information

PHS-electronic gmbh
- www.phs-memory.it -
Karl-Götz-Str. 5
97424 Schweinfurt
Germany

Phone: +49 9721 784678
E-Mail: info@phs-memory.it
Web: www.phs-memory.it

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at <https://www.phs-memory.it>