
phs memory®

32GB (2x16GB) Kit Computer memory DDR3 for Cisco UCS B440 M1 RDIMM



PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

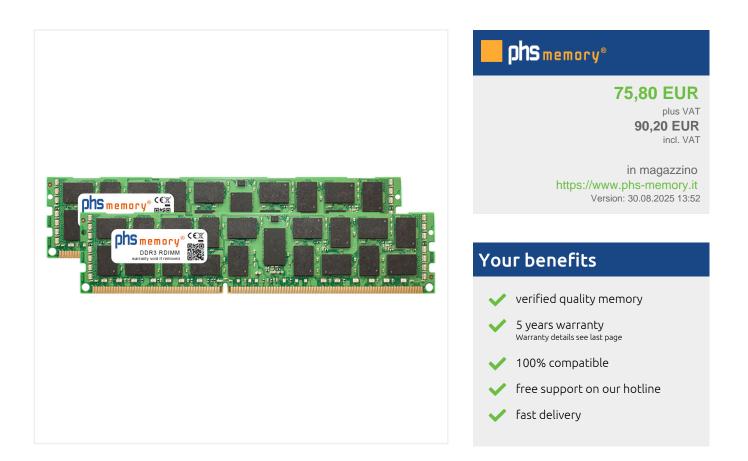

Memory Specification

4	- 133.35mm		
S4.68mm		9.5mm	30mm

Memory technologyDDR3ECC supportjaJEDEC NormPC3-10600RJEDEC Norm1Gx4DRAM Organization1Gx4Rank2Rx4TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantYesSKU2P257442EAN4063369258280	Memory size	16GB
JEDEC NormPC3-10600RDRAM Organization1Gx4Rank2Rx4TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions0° C - 85° COperating temperature-40° C - +95° CRoHS compliantYesSKUSP257442	Memory technology	DDR3
DRAM Organization1Gx4DRAM Organization1Gx4Rank2Rx4TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantYesSKUSpeciality	ECC support	ја
Rank2Rx4TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantYesSKUSpeciality	JEDEC Norm	PC3-10600R
TypeRDIMM (ECC Registered)Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantYesSKUSpeciality	DRAM Organization	1Gx4
Number of pins240 Pin DIMMMemory data transfer rate1333MHz @ CL9Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantYesSKUSP257442	Rank	2Rx4
Memory data transfer rate1333MHz@CL9Speciality-, DDPBoard dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantYesSKUSP257442	Туре	RDIMM (ECC Registered)
Speciality-, DDPBoard dimensions133,35 × 30 (L×B mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantYesSKUSP257442	Number of pins	240 Pin DIMM
Board dimensions133,35 x 30 (LxB mm)Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantYesSKUSP257442	Memory data transfer rate	1333MHz @ CL9
Operating temperature0° C - 85° CStorage temperature-40° C - +95° CRoHS compliantYesSKUSP257442	Speciality	-, DDP
Storage temperature-40° C - +95° CRoHS compliantYesSKUSP257442	Board dimensions	133,35 x 30 (LxB mm)
RoHS compliantYesSKUSP257442	Operating temperature	0° C - 85° C
SKU SP257442	Storage temperature	-40° C - +95° C
	RoHS compliant	Yes
EAN 4063369258280	SKU	SP257442
	EAN	4063369258280
	EAN	4063369258280

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	Cisco
Device type	Server
Device family	UCS
Device series	B400 Serie
Device name	UCS B440 M1
Maximum memory*	1TB / 512GB according to manufacturer
Number of memory sockets	32

* The specifications for the maximum memory upgrade may differ from those of the manufacturer Cisco. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Information on memory allocation

Computer memory configuration

Our memory team will be happy to help you choose the right memory and configure your server.

Maximum capacity by memory technology

Technologie	GB /Modul	Anzahl	Total
RDIMM	16GB RAM	32	512GB

UDIMM ECC memory and RDIMM (Registered) server memory can not be shared. Bei einer Aufrüstung sollten Sie deshalb wissen, welche memory bereits vorhanden sind or komplett auf RDIMMcomputer memory upgrade.

Principles of memory assembly

- Each CPU has 2 memory controllers with 4 memory slots each
- The 4 memory slots per memory controller must be identically equipped (4 identical memories each)
- The different memory controllers can be equipped differently
- Es können nur die memorysteckplätze genutzt werden, bei denen die jeweilige CPU vorhanden ist.

Memory configuration for good system performance

- verteilen Sie die memory gleichmäßig auf die memorysteckplätze and gleichmäßig auf die CPUs
- wenn alle memory slots einer CPU bestückt sind, ist die Performance until zum 3fachen schneller
- Wenn mehr als eine CPU vorhanden ist, sollten die memory pro CPU identisch (gespiegelt zur anderen CPU) bestückt werden.

Information on memory installation



- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
 - Do not touch the gold pins of the memory module
 - Only touch the sides of the memory module
 - Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.



Further memory options for Cisco UCS B440 M1

Size	SKU	Technology	Туре	Number of pins	Brand	Reference no.
8GB	SP257444	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	A02-M316GB3-2 , N01-M308GB2-L , UCS- MR-1X082RX-A, UCS- MR-1X082RY-A, UCS- MR-1X082RY-E
16GB	SP257442	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	A02-M332GB3-2 -L, A02-M316GB1-L , UCS- MR-1X162RY-E, UCS- MR-1X162RY-A

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.it/-W5Y



Contact Information

PHS-electronic gmbh - www.phs-memory.it -Karl-Götz-Str. 5 97424 Schweinfurt Germania Phone: +49 9721 784678 E-Mail: info@phs-memory.it Web: www.phs-memory.it

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at https://www.phs-memory.it