
phs memory®

32GB Computer memory DDR3 for Fujitsu Primergy BX922 S2 (D2861) RDIMM



PHS-memory® - computer memory with 100% quality

- many years of IT competence
- Free support for optimal configuration and product selection
- High availability through professional warehouse management
- Fast delivery in throughout Europe
- Short response times and professional order processing due to full digitalization throughout the entire process with complete traceability
- Incoming goods inspection include checks of the DRAMs, PCBs and the programmed SPDs in order to exclude possible errors (Controlled BOM).
- PHS-memory® brand memories guarantee 100% compatibility to the specified system.
- PHS-memory® memories can be used together with existing memories in the device depends on to the configuration rules of the system.
- The "fallback option" in the SPD of PHS-memory® allows DRAMs with higher clock rates to be operated together with older memory modules with lower clock rates within the system.
- Products with unique serial number for service and warranty
- Pre-sales and after-sales support by technically trained personnel

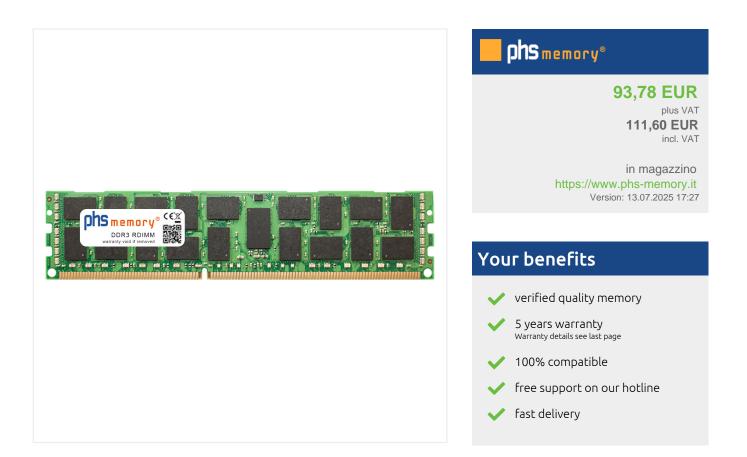

Memory Specification



Memory size	32GB		
Memory technology	DDR3		
ECC support	yes		
JEDEC Norm	PC3-10600R		
DRAM Organization	2Gx4		
Rank	4Rx4 (4DRx4 DDP)		
Туре	RDIMM (ECC Registered)		
Number of pins	240 Pin DIMM		
Memory data transfer rate	1333MHz @ CL9		
Speciality	DDP		
Board dimensions	133,35 x 30 (LxB mm)		
Operating temperature	0° C - 85° C		
Storage temperature	-40° C - +95° C		
RoHS compliant	yes		
SKU	SP462933		
EAN	4067488264405		

overRAMing maximize your RAM



Most systems - including the Fujitsu Primergy BX922 S2 (D2861) - can be upgraded with more memory than originally specified by the device manufacturer.

Therefore, our memory specialists continuously analyze new memory solutions in selected systems. Due to improved manufacturing technologies, new memories with higher performance and capacity will be tested for stability and functionality.

Then the new memory solutions are released for the respective systems. Use the benefits of larger computer memory capacity with the PHSmemory® overRAMing memory solutions.

https://www.phs-memory.it/-BOR

Note: The module specified in this datasheet is one of several possible configurations available under this part number.

Some details may differ from the specifications described here and the illustration, but have no negative influence on the functionality.



System Specifications

The memory is 100% compatible with this sytem:

System manufacturer	Fujitsu		
Device type	Server		
Device family	Primergy		
Device series	BX900 Serie		
Device name	Primergy BX922 S2 (D2861)		
Maximum memory*	384GB / 192GB according to manufacturer		
Number of memory sockets	12		

* The specifications for the maximum memory upgrade may differ from those of the manufacturer Fujitsu. Often the information given in the manual for the maximum memory upgrade is not up to date. New memory technologies, bios updates or newer software versions often allow the use of memory modules with a higher capacity than specified by the manufacturer with the same performance and stability.

Memory modules with our overRAMing-symbol are approved by us for maximum memory expansion.

Information on memory allocation

Information on memory configuration

The following technical specifications should be considered in advance:

- The device supports ECC DIMM (with error correction code) or RDIMM (Registered DIMM) RAM memories. RDIMM memories are recommended when large memory capacities are to be achieved.
- The different memory technologies (ECC / RDIMM) may not be mixed.
- If a memory expansion is to be made with the already existing RAM memories, it must be checked which memory technology (ECC/ RDIMM) is already installed in the system.
- A higher memory clock of the memory module automatically adapts to the memory clock specified by the system. This can be the case especially with larger capacities.
- Memory slots without a processor may not be used.

Technologie	ogie GB / Modul Count		Total	
UDIMM ECC	8GB RAM	12	96GB	
RDIMM	32GB RAM	12	384GB	

Principles of memory assembly

- The memory slots are organised in groups of 3.
- Only max. 2 slots per group of 3 can be used for UDIMM ECC memory.
- Only a maximum of 2 slots per group of 3 can be equipped with 4Rank RDIMM memory.
- The different groups of 3 slots do not have to have the same capacities.

Memory configuration for good system performance

- Distribute the memory evenly among the memory slots and equally among the CPUs.
- Bei jeweils 3 gleichen memoryn pro 3er Steckplatzgruppe, ist die Performance until zum 3fachen schneller im Vergleich einer Bestückung der 3er Steckplatzgruppe with nur einem memory.
- If there is more than one CPU, the RAM per CPU should be populated identically (mirrored to the other CPU).

phs memory®

Information on memory installation

- Turn off the system
- Remove the plug of the power supply unit (if connected)
- Remove the battery, according to the user manual of the system
- Always ground yourself before touching electronic components
- Protect the memory module from static voltages:
 - Do not touch the gold pins of the memory module
 - Only touch the sides of the memory module
 - Use a grounding strap and/or ESD glove if possible

General installation instructions are supplied by E-Mail.

phs memory®

Further memory options for Fujitsu Primergy BX922 S2 (D2861)

Size	SKU	Technology	Туре	Number of pins	Brand	Reference no.
4GB	SP470823	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
8GB	SP470824	DDR3	UDIMM ECC (ECC unbuffered)	240 Pin DIMM	PHS-memory®	
8GB	SP122991	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
16GB	SP147331	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	S26361-F3383-L 427
8GB	SP147271	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
32GB	SP462933	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	
16GB	SP147272	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	S26361-F3383-L 427
32GB	SP462934	DDR3	RDIMM (ECC Registered)	240 Pin DIMM	PHS-memory®	

PHS-memory® warranty

Every PHS-memory® is equipped with a 5-years-warranty of perfect operation. If the RAM module is defective or fails within 5 years of purchase when used properly, you will receive an appropriate RAM module free of charge. If a suitable memory module is no longer available, we will refund the purchase price.

For more information on warranty and service please visit https://www.phs-memory.it/-W5Y



Contact Information

PHS-electronic gmbh - www.phs-memory.it -Karl-Götz-Str. 5 97424 Schweinfurt Germania Phone: +49 9721 784678 E-Mail: info@phs-memory.it Web: www.phs-memory.it

All information without guarantee. Technical changes and errors excepted. You can find current price information in our online shop at https://www.phs-memory.it

phs memory[®]